


## E-Class HYBRID PLUS Wagon model 213 as of 2017










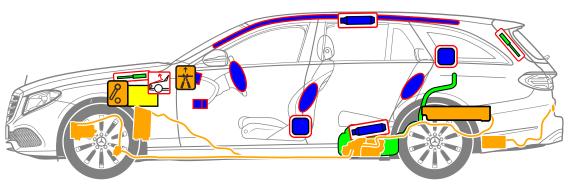

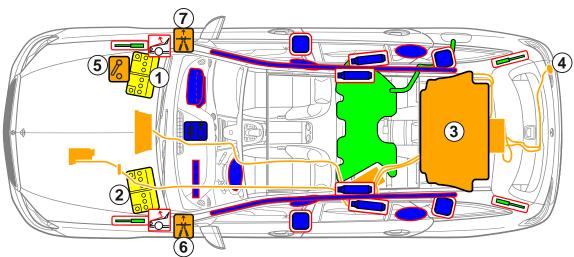

- 1 12 V Battery, Left-hand drive
- 2 12 V Battery, Right-hand drive
- 3 High-voltage battery
- 4 HV charge socket
- 5 High-voltage disconnect device
- 6 Alternative high-voltage disconnect device, Left-hand drive
- 7 Alternative high-voltage disconnect device, Right-hand drive

## A Note

The alternative high-voltage disconnect device is only to be operated when the high-voltage disconnect device in the engine compartment is inaccessible.

Switch off the ignition before operating the high-voltage disconnect device and the alternative high-voltage disconnect device.



Airbag



Gas generator



Seat belt tensioner



Restraint systems control unit



Gas-filled strut



Pedestrian protection



Fuel tank



12 V Battery



High-voltage battery



High-voltage components



High-voltage disconnect device




Alternative highvoltage disconnect device E-Class HYBRID PLUS Wagon model 213 as of 2017



High-voltage disconnect device


The high-voltage disconnect device is located in the engine compartment next to the coolant expansion reservoir on the right (viewed in the direction of travel).

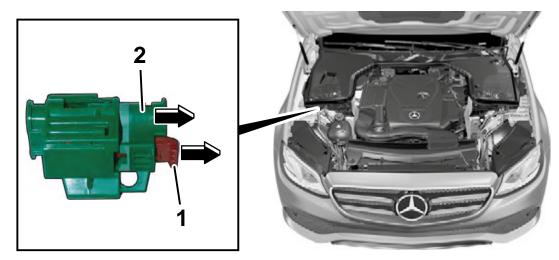


High-voltage disconnect device in engine compartment

Operate release (1) / Pull out switch (2)

Alternative high-voltage disconnect device
The alternative high-voltage disconnect device is located under the cover of the fuse box on the left of the cockpit. It is marked with an information label.



Information label on alternative high voltage disconnect device



Remove cover (1) of fuse box / Cut line at marked location (2)



E-Class HYBRID PLUS Wagon model 213 as of 2017



Vehicle identification

