


RENAULT

CLIO 5 E-Tech Hybrid




(2020 -)

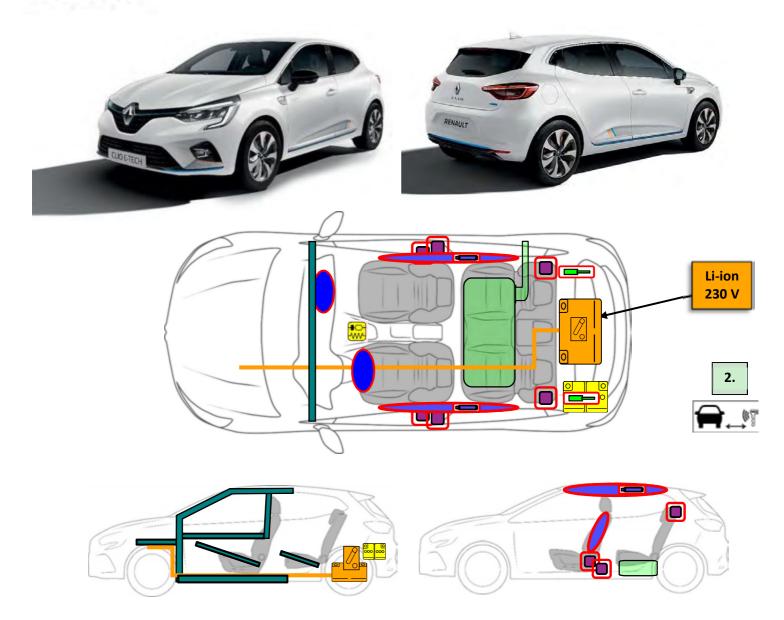


	Airbag		Stored gas inflator		Seat belt pretensioner	SRS control unit		Pedestrian protection active system
5	Automatic rollover protection system		Gas strut / Preloaded spring		High strength zone	Zone requiring special attention		
0000000	Battery low voltage	HH	Ultra- capacitor, low- voltage		Fuel tank	Gas tank	X	Safety valve
	Battery pack, high-voltage	7	High voltage power cable	2%	High voltage component	Fuse box disabling high voltage	 	High voltage ultra- capacitor

Brand	Modele	Phase	Year of launch	Internal reference	Creation date	Update date	Version	Page
RENAULT	CLIO 5 E- Tech Hybrid	1'	2020	RSE-FAD-BJA HEV-2020-0	25/09/2020		0	1 / 4

1. Identification / recognition

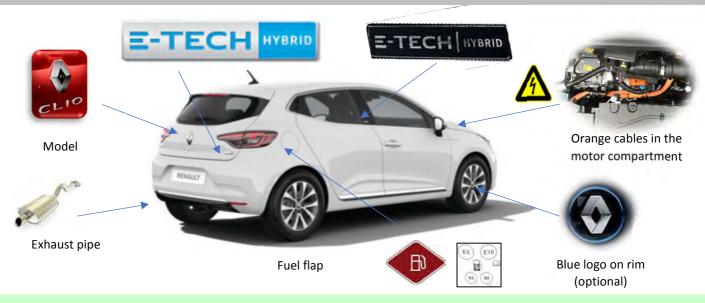

2. Immobilisation / stabilisation / lifting



① Press the Start/stop button

Screen view




Move the lever to the "P" position (Position forward)

Hands-free card



Move Hands-free card away, more than 5 m





Orange 230V cables area

3. Disable direct hazards / safety regulations

12 Volts Battery

In the trunck





- 1- Switch off the ignition
- 2- Disconnect the negative terminal (-)

Brand	Modele	Phase	Year of launch	Internal reference	Creation date	Update date	Version	Page
RENAULT	CLIO 5 E- Tech Hybrid	1'	2020	RSE-FAD-BJA HEV-2020-0	25/09/2020		0	2 / 4


3. Disable direct hazards / safety regulations (next)

230 Volts battery

Only if cutting operation is necessary:

Disconnection of the 230 Volts battery by removing the service plug.






















- Press the orange release tab while lifting the green lever
- **3** & **4** Pull the lever to remove the service plug

4. Access to the occupants


STEERING COLOMN



Steering column hollow and breakable with tools

Brand	Modele	Phase	Year of launch	Internal reference	Creation date	Update date	Version	Page
RENAULT	CLIO 5 E- Tech Hybrid	1'	2020	RSE-FAD-BJA HEV-2020-0	25/09/2020		0	3 / 4

HARDENED STEEL HIGH ELACTIC LIMIT (HEL)

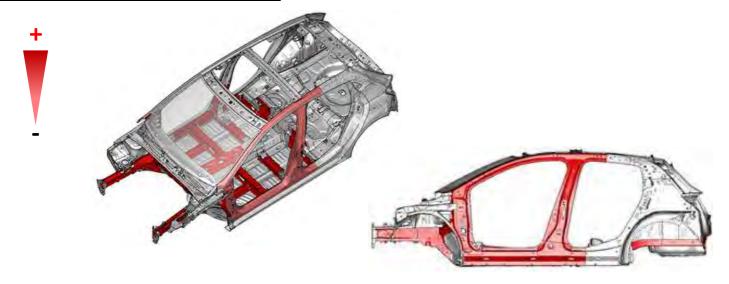

5. Stored energy / liquids / gases / solids

Li-ion	Lithium-ion	1.2 kW.h	230 V			E5 E10	39 L
--------	-------------	----------	-------	--	--	--------	------

6. In case of fire

TAILGATE GAS STRUTS



Risk of missile effect of tailgate gas struts

10. Explanation of pictograms used



Hybrid Electric Vehicle on fuel of liquid group 2



Remove smart key

Brand	Modele	Phase	Year of launch	Internal reference	Creation date	Update date	Version	Page
RENAULT	CLIO 5 E- Tech Hybrid	1'	2020	RSE-FAD-BJA HEV-2020-0	25/09/2020		0	4 / 4